

QUATRO®

ASTM DIELECTRIC

MOISTURE WICKING
& ANTI BACTERIAL

ACTIVATED
CHARCOAL

HEEL &
ARCH
SUPPORT

RAISED POLITECH®
SHOCK ABSORBING
PAD



DIELECTRIC PROPERTIES

ASTM F1117
TEST VOLTAGE: 20KV

PROTECTIVE TOE

ASTM F2413-11
(M/1/75/C/75)

- ANKLE-LOCKING DESIGN
- SUPER-FLEX™ OZONE & FLEX RESISTANT YELLOW RUBBER UPPER
- QUICK-DRY HI VIZ YELLOW POLYESTER LINING
- SUREGRIP-360™ NITRILE RUBBER OUTSOLE
- EXTRA WIDE WAIST BAR WITH BUILT IN LADDER GRIPS
- NITRILE RUBBER HEAT, OIL AND CHEMICAL RESISTANT OUTSOLE

- LIGHT WEIGHT FIBREGLASS SHANK
- COMFORTFORM STEEL TOE CAP
- ADDITIONAL TUFF-GUARD RUBBER TOE PROTECTOR
- EXTRA STIFF COUNTER FOR ANKLE SUPPORT
- REMOVABLE PREMIUM QUATRO COMFORT INSOLE

PART CODES	DESCRIPTION	SIZE RANGE
FQD105-115	QUATRO ASTM DIELECTRIC	MENS 5-15 (FULL SIZES ONLY)


WWW.SKELLERUPFOOTWEAR.COM

SKELLERUP FOOTWEAR USA · 1890 LYNDON BLVD · FALCONER · NY 14733 · 855-253-0920

QUATRO®

MARKING ON SKELLERUP QUATRO DIELECTRIC

STANDARDS MARKING ON THE FOOTWEAR LINING

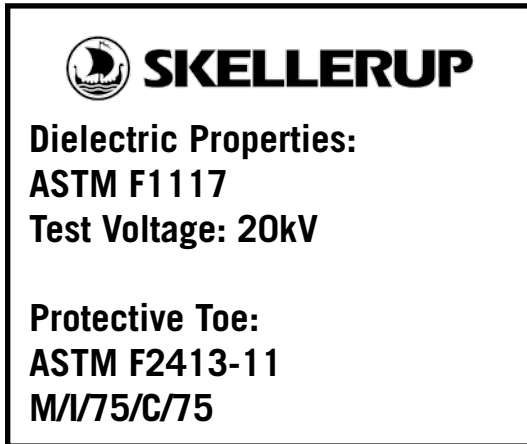

← MANUFACTURER

← DIELECTRIC STANDARD

← TEST VOLTAGE RATING

← SAFETY STANDARD

← CATEGORY

OTHER INFORMATION SCREEN PRINTED ON THE FOOTWEAR LINING



← SIZE

← MODEL NAME

← MODEL NUMBER


A/15

← MANUFACTURING BATCH

Made by Skellerup in China

← COUNTRY OF ORIGIN

TRANSFER LABEL (BLACK & TRANSPARENT) ON THE OUTSIDE OF THE FOOTWEAR

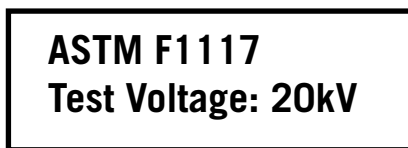

UNIQUE SERIAL NUMBER TO IDENTIFY EACH BOOT ON THE FOOTWEAR LINING



WWW.SKELLERUPFOOTWEAR.COM